


**SPECIFICATION**  
**HW032**

**UL 1028**

**600 Volt, 105°C**  
**PVC Insulation**  
**Solid or Stranded Copper Conductor**

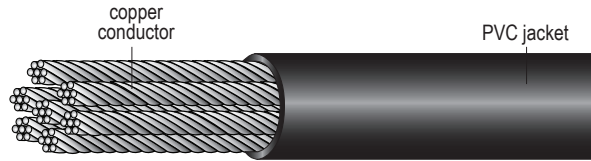

Catalog Number	Size AWG/kcmil	Number of Strands	Insulation Thickness Mils	Nominal Cond. Diameter Inch	Overall Diameter Inches	Net Weight Lbs/Mft
HW032 08	8	133/29	47	0.166	0.260	72

**APPLICATION:**

Used as internal wiring for appliances and electrical and electronic equipment. Also used for wiring and cable assemblies in data and electronic equipment.

**CONDUCTOR:**

Solid or stranded annealed bare or tinned copper per ASTM B33

**INSULATION:**

Flame, chemical and moisture resistant PVC

**CHARACTERISTICS:**

- UL VW-1 Vertical Flame Test
- Temperature Range:  
-20°C to 105°C  
CSA TEW-105
- Voltage Rating: 600 Volt RMS
- UL and CSA TEW, MTW

**STOCK COLORS:**

Multiple colors available