


SPECIFICATION
HW034

UL 1283

600 Volt, 105°C

PVC Insulation

Solid or Stranded Copper Conductor

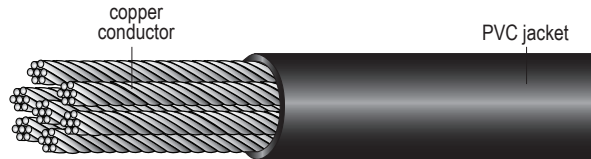

Catalog Number	Size AWG/kcmil	Number of Strands	Insulation Thickness Mils	Nominal Cond. Diameter Inch	Overall Diameter Inches	Net Weight Lbs/Mft
HW034 06	6	133/27	62	0.213	0.334	115.29
HW034 04	4	133/25	62	0.265	0.388	169.54

APPLICATION:

Used as internal wiring for appliances and electrical and electronic equipment. Also used for wiring and cable assemblies in data and electronic equipment.

CONDUCTOR:

Solid or stranded annealed bare or tinned coated copper per ASTM B33

INSULATION:

Flame, chemical and moisture resistant PVC

CHARACTERISTICS:

- UL VW-1 Vertical Flame Test
- Temperature Range:
-20°C to 105°C 1283
CSA TEW-105
- Voltage Rating: 600 Volt RMS
- UL and CSA TEW, MTW

STOCK COLORS:

Black, green, grey, red and white