


**INDUSTRIAL POWER
& APPARATUS WIRE**

**600 Volt UL 200°C
FEP Teflon® Insulation
Tinned Copper Conductor**

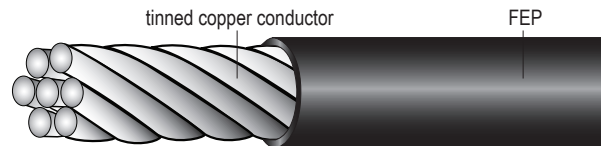

Catalog Number	Size AWG	Number of Strands	Insulation Thickness Mils	Overall Diameter Inches	Net Weight Lbs/Mft
HW056 01601	16	7	20	0.09	12
HW056 01401	14	7	20	0.10	19
HW056 01201	12	19	20	0.12	25
HW056 01001	10	37	20	0.15	36
HW056 00801	8	49	30	0.22	70
HW056 00601	6	49	30	0.26	103
HW056 00401	4	133	30	0.32	158
HW056 00201	2	133	30	0.39	251

APPLICATION:

For use in power and control circuits in high temperature, caustic environments where durability, flexibility and resistance to moisture is required.

CONDUCTOR:

16 AWG – 14 AWG: Tin coated, soft annealed copper per ASTM B-33

INSULATION:

FEP Teflon®

FLAME TESTS:

- VW-1 Flame Test
- FT-1 Flame Test

STOCK COLORS:

Black, white, red and green