


**SPECIFICATION**  
**HW402**

**MULTIPLE PAIR**

**UL Type CMR, CL3R, 75°C**  
**Non-Shielded**  
**PVC Insulation & PVC Jacket**  
**Copper Conductors**

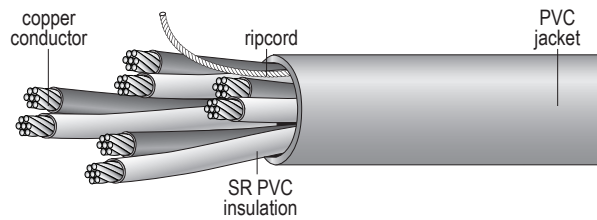

Catalog Number	Size AWG	Number of Pairs	Number of Strands	Insulation Thickness Mils	Jacket Thickness Mils	Overall Diameter Inches	Net Weight Lbs/Mft
HW402 02202	22	2	7	10	15	0.19	19
HW402 02203	22	3	7	10	15	0.21	26
HW402 02204	22	4	7	10	15	0.23	32
HW402 01802	18	2	7	10	15	0.25	34
HW402 01803	18	3	7	10	15	0.27	48

**APPLICATION:**

For use in remote control signaling and power-limited circuit applications where protection from electrostatic interference is not required, for security, intercom, public address, sound and audio systems.

**CONDUCTORS:**

Stranded soft bare annealed copper per ASTM B-3

**INSULATION:**

Semi-rigid PVC

**JACKET:**

Gray PVC with a ripcord applied longitudinally under the jacket to facilitate stripping

**FLAME TESTS:**

UL 1666 Flame Test

**COLOR CODE:**

See Appendix, Chart 2

**ADDITIONAL STANDARDS:**

- UL Standard 13, NEC Article 725 Type CL3R
- UI Standard 444, NEC Article 800 Type CMR