


UL 1015

**600 Volt, 105°C
PVC Insulation
Solid or Stranded Copper Conductor**

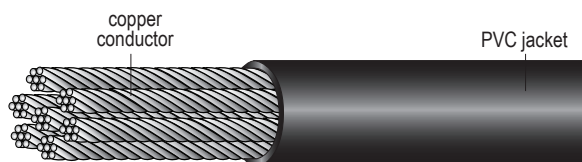

Catalog Number	Size AWG/kcmil	Number of Strands	Insulation Thickness Mils	Nominal Cond. Diameter Inch	Overall Diameter Inches	Net Weight Lbs/Mft
HW031 26	26	7/34	32	0.019	0.081	3.890
HW031 24	24	7/32	32	0.024	0.086	4.850
HW031 22	22	7/30	32	0.030	0.093	5.910
HW031 20	20	10/30	32	0.037	0.100	7.250
HW031 18	18	16/30	32	0.048	0.109	9.730
HW031 16	16	26/30	32	0.060	0.122	13.550
HW031 14	14	41/30	32	0.075	0.137	19.150
HW031 12	12	65/30	32	0.096	0.157	28.540
HW031 10	10	105/30	32	0.130	0.187	42.170

APPLICATION:

Used as internal wiring for appliances and electrical and electronic equipment. Also used for wiring and cable assemblies in data and electronic equipment.

CONDUCTOR:

Solid or stranded annealed bare or tinned copper per ASTM B33

INSULATION:

Flame, chemical and moisture resistant PVC

CHARACTERISTICS:

- UL VW-1 Vertical Flame Test:
- Temperature Range:
-20°C to 105°C UL 1015,
CSA TEW-105
- Voltage Rating: 600 Volt RMS
- UL and CSA Style TEW, MTW

STOCK COLORS:

Multiple colors available

STYLE OPTIONS:

- 1011 80°C VW-1
- 1013 90°C VW-1
- 1015 105°C VW-1
- 1032 90°C VW-1 – 1000 Volt
- 1230 105°C VW-1 – Moisture Resistant 60°C