


UL 1061

300 Volt, 80°C

PVC Insulation

Solid or Stranded Copper Conductor

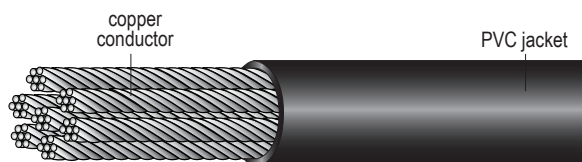

Catalog Number	Size AWG/kcmil	Number of Strands	Insulation Thickness Mils	Nominal Cond. Diameter Inch	Overall Diameter Inches	Net Weight Lbs/Mft
HW033 30	30	7/38	9	0.012	0.032	0.09
HW033 28	28	7/36	9	0.015	0.035	1.08
HW033 26	26	7/34	9	0.019	0.039	1.46
HW033 24	24	7/32	9	0.024	0.044	2.18
HW033 22	22	7/30	9	0.030	0.051	3.29
HW033 20	20	10/30	9	0.037	0.058	4.05
HW033 18	18	16/30	9	0.048	0.068	6.12
HW033 16	16	26/30	9	0.060	0.080	9.42

APPLICATION:

Used as internal wiring for appliances and electrical and electronic equipment. Also used for wiring and cable assemblies in data and electronic equipment.

CONDUCTOR:

Solid or stranded annealed bare or tinned copper per ASTM B33

INSULATION:

Flame, chemical and moisture resistant PVC

CHARACTERISTICS:

- UL VW-1 Vertical Flame Test
- Temperature Range:
-10°C to 80°C UL1061,
CSA T11 SR-PVC 80°C
- Voltage Rating: 300 Volt RMS
- UL and CSA Dual Rated Wire

STOCK COLORS:

Multiple colors available