


**PLENUM CABLE –
MULTIPLE PAIR**

**UL Type CMP, CL3P, 60°C
Individually Shield Pairs
LS PVC Insulation & LS PVC Jacket
Copper Conductors**

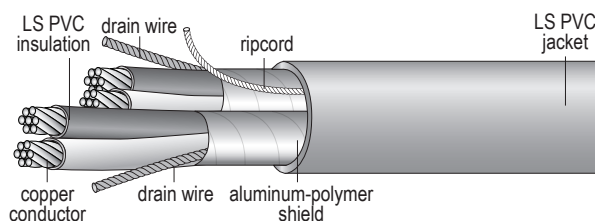

Catalog Number	Size AWG	Number of Pairs	Number of Strands	Insulation Thickness Mils	Jacket Thickness Mils	Overall Diameter Inches	Net Weight Lbs/Mft
HW408 02202	22	2	7	9	15	0.22	26
HW408 02203	22	3	7	9	15	0.23	37
HW408 02204	22	4	7	9	15	0.26	46
HW408 02206	22	6	7	9	15	0.31	58

APPLICATION:

For use in plenum areas in remote control signaling and power-limited circuit applications where superior protection from electrostatic interference is required, for security, intercom, public address, sound and audio systems.

CONDUCTORS:

Stranded soft bare annealed copper per ASTM B-3

INSULATION:

Low smoke PVC (LS PVC)

INDIVIDUAL SHIELD:

Aluminum-polymer tape providing 100% coverage with a flexible 7-strand tinned copper drain wire

JACKET:

Beige low smoke PVC (LS PVC) with a ripcord applied longitudinally under the jacket to facilitate stripping

FLAME TESTS:

UL 910 Steiner Tunnel Flame Test

COLOR CODE:

See Appendix, Chart 2

ADDITIONAL STANDARDS:

- UL Standard 13, NEC Article 725 Type CL3P
- UL Standard 444, NEC Article 800 Type CMP